

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
 - TEXT CUT OFF AT TOP, BOTTOM OR SIDES
 - FADED TEXT
 - ILLEGIBLE TEXT
 - SKEWED/SLANTED IMAGES
 - COLORED PHOTOS
 - BLACK OR VERY BLACK AND WHITE DARK PHOTOS
 - GRAY SCALE DOCUMENTS
-

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶: C08J 5/18, C08L 67/02, E04D 12/00, C08K 5/3492	A1	(11) International Publication Number: WO 97/23551 (43) International Publication Date: 3 July 1997 (03.07.97)
(21) International Application Number: PCT/NL96/00492 (22) International Filing Date: 20 December 1996 (20.12.96) (30) Priority Data: 1001978 22 December 1995 (22.12.95) NL. (71) Applicant (for all designated States except US): DSM N.V. [NL/NL]; Het Overloon 1, NL-6411 TE Heerlen (NL). (72) Inventors; and (75) Inventors/Applicants (for US only): GOERTZ, Henricus, Jo- hannes, Jacobus [NL/NL]; Margrietstraat 41, NL-6155 LA Puth (NL); HULSKOTTE, Richerdes, Johanna, Mathilda [NL/NL]; Breijenrode 43, NL-6365 CT Schinnen (NL). BORGGREVE, Reinoldus, Jozef, Maria [NL/NL]; Frank Smitstraat 1, NL-6336 VG Hulsberg (NL). (74) Agent: ALFENAAR, Marinus; Octrooibureau DSM, P.O. Box 9, NL-6160 MA Geleen (NL).		(81) Designated States: CA, NZ, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(54) Title: CONSTRUCTION SHEETING (57) Abstract The invention relates to a plastic sheeting which is suitable, in particular, for application in the construction industry. It is obtained by employing polyetherester block copolymers and has good humidity-regulating properties and water impermeability. Flame retardancy in accordance with DIN 4102 B2 is obtained by employing melamine, melamine compounds or melamine condensates in the polyetherester composition for the sheeting.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

CONSTRUCTION SHEETING

5

The invention relates to a plastic sheeting for use in the construction industry. Examples of such a sheeting are a sheeting based on a polyolefin, for example polyethylene, which is used, in particular, as a temporary provision against rain and wind for buildings still under construction, and sheeting based on poly(vinylchloride), which is used, in particular, as a damp-proof course above, for example, window and door frames and adjacent brickwork and, often reinforced by a woven, as a roofing material. These known sheetings have the drawback, however, that their permeability to water vapour is very poor, as a result of which it is virtually impossible to control humidity, and condensation and rot may occur. To counter this drawback, the sheeting is perforated in some cases. This additional treatment, however, adversely affects the tear strength of the sheeting and may locally result in small leaks.


EP-A-167714 and JP-A-0490337 disclose plastic sheeting for the construction industry which is permeable to water vapour. The plastics selected in these publications are polyetheramide and polyesterester block copolymers, the polyetheramide block copolymer being able to retain more than its own weight in water. The use of these known water vapour-permeable plastic sheetings encounters a number of drawbacks, however. Thus the polyether-amide block copolymer sheeting has virtually no mechanical strength once it has absorbed water, and its rate of production is limited by the limited crystallinity and crystallization rate of the polyetheramide block

copolymer. Because of this and also because of the higher price of the starting material, the sheeting is relatively expensive. Sheets of polyesterester block copolymers have the major drawback that they are not
5 suitable for long-term use in a humid environment, owing to the polyesterester block copolymer being highly sensitive to hydrolysis which, inter alia, causes a rapid fall-off in strength.

An object of the invention is therefore a
10 water-impermeable, yet water vapour-permeable plastic
sheeting, which does not have the above-mentioned
drawbacks and is suitable for use in the construction
industry.

This object has been achieved by means of a plastic sheeting made of a polyetherester block copolymer.

Polyetherester block copolymers are thermoplastic copolymers having elastomeric characteristics, the copolymer being composed of hard, readily crystallizable segments and of soft or elastomeric segments, of which the currently most common can be described by the following general formulae:

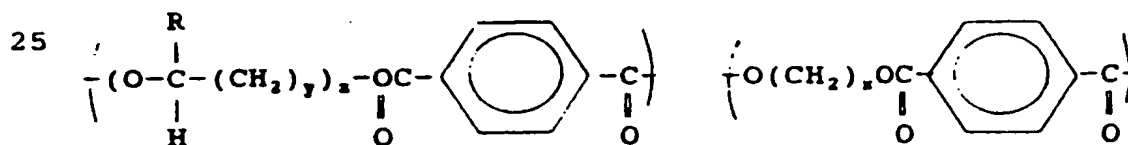

30 R = H or CH₃; y = 1 or 3; z = 8-50 x = 2-4
soft hard.

The hard segments preferably comprise alkylene terephthalate units, but it is also possible for units derived from other aromatic dicarboxylic acids, for example naphthalenedicarboxylic acid, p-diphenyldicarboxylic acid and isophthalic acid to be

present in the hard segments. Examples of alkylenediols are ethylene glycol, propylene glycol, butylene glycol or hexylene glycol, but it is also possible for the glycol of butene to be used for the preparation of the esters for the hard segment.

The soft segments are generally poly(alkylene oxides) esterified with terephthalic acid. Here, too, it is possible for other aromatic acids to be used. Preference is given to the use of poly(propylene oxide) or poly(tetramethylene oxide). It is possible for ethylene oxide units to be incorporated in minor amounts, i.e. less than 50 mol%, preferably less than 30 mol%, in the poly(alkylene oxide) segments, for example by employing polypropylene oxide chains terminated with ethylene oxide.

A comprehensive description of polyetherester block copolymers and their preparation can be found in Encyclopedia of Polymer Science and Technology, Volume 12, pages 76-177 (1985) and the references reported therein.

Various polyetherester block copolymers are commercially available from a number of companies under various tradenames, for example ARNITEL E and P of DSM, the Netherlands, HYTREL of E.I. Du Pont De Nemours, USA, and LOMOD of General Electric Plastics, USA.

Varying the ratio hard/soft segment and using different alkylene oxides and molar weights of the soft segments makes it possible to obtain block copolyesters having different hardnesses, for example between Shore D 30 and 80. Preferably, polyetherester block copolymers having a Shore D hardness between about 35 and 60 are employed for the sheeting according to the invention. Block copolymers whose hardness is too low often have less good processing characteristics into sheeting, owing to the relatively low crystallinity and crystallization rate. At higher hardnesses, the bending strength and the water vapour permeability decrease

unduly.

Depending on the desired pattern of characteristics, those skilled in the art will be able to select the correct polyetherester block copolymer for the sheeting according to the invention.

The polyetherester block copolymer of the sheeting may contain the usual additives, for example stabilizers, dyes or pigments, fillers, processing aids, for example release agents, etc.

For most applications it is necessary for the sheeting according to the invention to satisfy the nonflammability requirements imposed by the authorities. A requirement often applicable to construction sheeting is the DIN 4102 B2 classification. This involves a sheet being suspended vertically and a specified Bunsen burner having a flame length of 20 mm being directed, at an angle of 45 degrees, against the edge or the surface of the sheet. The flame is held against the sheet for 15 seconds, after which the burn time until the flame tip reaches a mark (150 mm above the flame application point) is measured. If this burn time is 20 seconds or longer (measured on 5 samples), the B2 classification is complied with.

Known flame retardants for use in construction sheeting are combinations of a halogenated organic compound with antimony oxide, as reported, for example, in EP-A-0109928. Quite apart from the drawbacks, corrosivity and potential toxicity, this combination proves unable, according to the invention, even at a high concentration in the sheeting, to conform with DIN 4102 B2. Other known flame retardants for sheeting are metal hydroxides, for example alumina trihydrate and magnesium hydroxide in high concentrations, 60-80 wt%, see US-A-4851463. Owing to the high concentration required of these inorganic materials in the sheeting, the mechanical

characteristics are significantly impaired, which means that the use thereof must be avoided.

Most surprisingly, the inventors have found that the use of melamine, melamine compounds, for example melamine cyanurate, and melamine condensation products, for example melam, in the sheeting results in a flame retardancy which meets the B2 classification. The use of melamine cyanurate in flame-retarding compositions for polyetherester copolymers is known. JP-A-2-88668 discloses that melamine cyanurate, if added in very low concentration to the commonly used halogenated organic flame retardant, enhances its effectiveness. In a comparative experiment it is shown that the effect of the use of melamine cyanurate as the only flame retardant is negligible.

The content of melamine, melamine compound or melamine condensation product in the sheet is between 7 and 30 wt%, based on the polyetherester copolymer. Preferably, the content is between 9 and 25 wt%. The content is primarily determined by the desired level of flame retardancy and depends, inter alia, on the thickness of the sheet.

In the case of very thin films for instance < 50 μm , a content of 5 wt.% may already suffice to fulfill the DIN 4102 B2 requirement. However the reinforcing backing and/or additives adversely influence the flame retarding so that higher contents, > 7 wt.%, are preferred.

The particle size of the flame-retarding compound is preferably chosen to be as small as possible, preferably < 50 μm , more preferably < 20 μm . The best results are achieved with a particle size of < 10 μm .

If required, it is additionally possible to use, in the composition of the flame-resistant sheeting according to the invention, a minor amount of a compound which enhances the flame-retarding effect.

Preferably, such a compound is chosen from the group of compounds which, in the event of a fire, do not produce corrosive and/or toxic gases. Examples of such compounds are polymers derived from aromatic compounds, for example novolaks and polyphenylene ethers, metal compounds, for example oxides, borates or oxalates, and organic phosphorus-containing compounds. Preferably, the content of these compounds which enhance the flame-retarding effect is smaller than 50 wt%, based on the melamine, the melamine compound or the melamine condensate.

In general, melamine will be used only in the case of sheeting containing a polyetherester copolymer having a low melting point, preferably in the order of 200°C or less. In the case of higher melting points and concomitantly necessary processing temperatures it is possible for fouling of the processing equipment and "bleeding" of melamine to the surface of the sheeting to occur, as a result of the relatively high volatility of melamine. The use of melamine cyanurate or melam is therefore to be preferred.

The flame retardant sheeting according to the invention is obtained by methods known per se from the copolyetherester composition. The copolyetherester composition is generally obtained by melt blending of the polyetherester block copolymer with the melamine, melamine cyanurate or melamine condensate and, if required, other additives, for example stabilizers. Said melt blending can take place in the customary melt blending equipment, the use of a blending extruder, preferably a twin-screw extruder, being preferable to obtain good dispersion of the flame retardant in the composition. Then the granules obtained after the blending extrusion step are processed in the customary film and sheet production equipment to give the sheeting of the desired thickness, use being made, in general, of sheet extrusion equipment.

The sheet may have any thickness required, for example between 20 μm and a few mm. Preferably the thickness of the sheet is less than 1 mm, more preferably less than 0.75 mm, most preferably less than 0.5 mm, to be effective as a water-vapour permeable medium. The very thin sheeting is generally used in combination with one or more other porous supports which are to ensure the mechanical strength, such as described, for example, in JP-A-0490337.

If required, the sheeting is used in combination with a fibrous material which is to ensure the required strength. Examples of such fibrous materials are organic fibres, for example polyester fibres or fibres of aromatic or aliphatic polyamides, and inorganic fibres, for example glass fibre. Said fibrous material may be present in the form of a woven or as a staple fibre web. The fibre-reinforced sheeting can be obtained, for example, by coextrusion of the woven or the staple fibre web with the copolyetherester, or by means of compression-moulding the fibre structure with the polyetherester sheeting.

In addition the sheeting may contain various additives to improve the colour and the appearance.

The sheeting according to the invention can be used in highly diverse ways, for example as a component of a roof covering or as an underlay therefor, as protective sheeting above wooden subassemblies, for example door and window frames, as sheeting to drain away any rainwater or condensation water which has penetrated a cavity wall, as a seal between adjoining brickwork, as a wall covering, in which case the accompanying qualities such as elasticity and "soft touch" can be utilized in particular, and many other uses in the construction industry where the qualities of humidity control and water impermeability matter.

Although, for the time being, the main appli-

cations of the sheeting are to be found within the construction industry, applications outside this sector can also be indicated, for example in furniture upholstery, where good humidity regulation is one of the factors defining comfort and there are requirements regarding flame retardancy.

The invention is now explained in more detail with reference to the following examples, without, however, being limited thereto.

10

Materials used:

Arnitel EM 400®: from DSM, the Netherlands; a polyetherester block copolymer containing polybutylene terephthalate as hard segments, and soft segments of polytetramethylene oxide, Shore D hardness = 40.

Arnitel PM 380®: from DSM, the Netherlands; a polyetherester block copolymer containing polybutylene terephthalate as hard segments, and soft segments of polypropylene oxide/ethylene oxide 60/40, Shore D hardness = 38.

Melamine: from DSM, particle size $d_{90} < 50 \mu\text{m}$

Melamine cyanurate (Mecy): from DSM, aver. particle size $50\% < 2 \mu\text{m}$

F-2400®: from Dead Sea Bromine, Israel, Br-epoxy polymer compound containing 52 wt% of Br, M = approx. 60,000.

Sb₂O₃: an 80 wt% masterbatch in PBT, from Campine.

Spinflam MF83®: from Himont, P- and N-containing intumescent flame retardant based on a piperazine salt.

CDP: from MFC, cresyl diphenyl phosphate

Chimasorb 944®: from Ciba Geigy, a UV stabilizer based on a hindered amine oligomer.

Examples I and II, experiments A-E

35

Arnitel PM 380, after drying, was blended in a ZSK 30/33 D twin-screw extruder with the flame retardants listed in Table 1. Screw speed 200 rpm,

throughput 10 kg/h, melt temperature 245°C. The granulate obtained was extruded, to produce a film having a thickness of 0.4 mm, on a Battenfeld 45 mm film extruder at a melt temperature of 216°C and a roller temperature of about 20-25°C and a rolling speed of 3.13 m/min.

The water vapour permeability, the water absorption after 3 days' immersion in water at 25°C, and flame retardancy according to DIN 4102 B2 of this film were determined.

The results of these tests are shown in Table 1.

+ means "meets the requirements for roofing sheeting".

++ means "amply meets the requirements for roofing sheeting". "N" is below standard.

Example III

Example II is repeated, except that 50 % of the melamine cyanurate is replaced by melamine. This composition likewise is found to meet DIN 4102 B2.

Examples IV and V

Examples I and II were repeated, except that Arnitel EM 400 was used instead of Arnitel PM 380.

Examples VI, VII and VIII

The compositions of Ex. I and IV and V were additionally admixed with 0.5 wt% of Chimasorb 944 FL, and the stability of the sheeting when subjected to UV light was determined by means of an Atlas UVCON apparatus comprising a UV-B313 nm lamp with an exposure, each time, of 4 hours at 60°C, and 4 hours' condensation at 50°C. The breaking elongation of the film was determined by means of a Zwick 1445 instrument, drawing speed 50 mm/min, on an ISO 237 tension test bar ($L_0 = 12$ mm, $b_0 = 2$ mm). The results are reported in Table 2.

TABLE 1

	Exp. A	B	C	D	E	Exa. I	Exa. II	Exa. IV	Exa. V
Arnitel PM 380	93*)	86	78.75	85	95	100	90		
Arnitel EM 400								100	90
Mecy							10		10
F-2400	5	10	15						
Sb ₂ O ₃	2	4	6.25						
Spinflam MF 83				15					
CDP					5				
water absorption [%]						1.9	1.7	0.75	0.70
water vapour permeability						++	++	+	+
DIN 4102 B2	N	N	N	N	N	N	complies	N	complies

*) composition in parts by weight

5

10

15

TABLE 2

5	Arnitel EM 400	100	99.5	89.5	
	Arnitel PM 380				99.5
	Mecy			10	
	0.5 wt% of Chimasorb		0.5	0.5	0.5
	Ageing *) [hours]	95	> 200	> 200	95

10

*) The measure chosen for ageing under UV light is the time until the breaking elongation has decreased to 250 %.

C L A I M S

1. Plastic sheeting suitable for application in the construction industry, characterized in that the plastic is a polyetherester block copolymer.
2. Plastic sheeting according to Claim 1, characterized in that the polyetherester block copolymer contains hard segments derived from aromatic dicarboxylic acids chosen from the group consisting of iso- and terephthalic acid, naphthalenedicarboxylic acids and p-diphenyldicarboxylic acids.
3. Plastic sheeting according to Claim 1 or 2, characterized in that the polyetherester block copolymer contains soft segments derived from C₂-C₄-polyalkylene oxides.
4. Plastic sheeting according to Claim 3, characterized in that less than 50 mol% of the polyalkylene oxide consists of ethylene oxide.
5. Plastic sheeting according to Claim 4, characterized in that less than 30 mol% of the polyalkylene oxide consists of ethylene oxide.
6. Plastic sheeting according to any one of the preceding claims, characterized in that the polyetherester block copolymer has a Shore D hardness of between 30 and 80.
7. Halogen free flame retardant plastic sheeting according to any one of the preceding claims, characterized in that it contains 7-30 wt%, based on the block copolymer, of one or more substances chosen from the group consisting of melamine, melamine compounds and melamine condensates.
8. Sheetting according to Claim 7, characterized in that the melamine compound is melamine cyanurate.
9. Sheetting according to any one of the preceding claims, characterized in that a UV stabilizer is also present.

10. Sheeting as substantially specified in the description and examples.

INTERNATIONAL SEARCH REPORT

Intern. Nat. Application No.

PCT/NL 96/00492

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 C08J5/18 C08L67/02 E04D12/00 C08K5/3492

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 C08J C08L E04D C08K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DATABASE WPI Week 7646 Derwent Publications Ltd., London, GB; AN 76-86050x XP002010816 & JP 51 111 290 A (MITSUBISHI PETROCH KK) , 2 October 1976 see abstract ---	1-10
X	DATABASE WPI Week 9219 Derwent Publications Ltd., London, GB; AN 92-154500 XP002010817 & JP 04 090 337 A (TOKUYAMA SODA KK) , 24 March 1992 cited in the application ---	1-6, 10
Y	see abstract ---	7-9
	-/-	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- * "A" document defining the general state of the art which is not considered to be of particular relevance
- * "E" earlier document but published on or after the international filing date
- * "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- * "O" document referring to an oral disclosure, use, exhibition or other means
- * "P" document published prior to the international filing date but later than the priority date claimed

* "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

* "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

* "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

* "&" document member of the same patent family

Date of the actual completion of the international search

3 April 1997

Date of mailing of the international search report

29.04.97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Decocker, L

INTERNATIONAL SEARCH REPORT

Inter- national Application No.
PCT/NL 96/00492

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		Relevant to claim No.
Category *	Citation of document, with indication, where appropriate, of the relevant passages	
Y	<p>DATABASE WPI Week 9019 Derwent Publications Ltd., London, GB; AN 90-143178 XP002010818 & JP 02 088 668 A (TOYOCO KK) cited in the application see abstract</p>	7-9
X	<p>--- EP 0 265 922 A (E. I. DU PONT DE NEMOURS AND COMPANY) 4 May 1988 see page 5, line 1 - line 42; claims 1-18 see page 8, line 43 - line 54</p>	1-6,9,10
P,X	<p>--- EP 0 708 212 A (EWALD DÖRKEN AG) 24 April 1996 see claims 1,10</p>	1-6,9,10
A	<p>--- US 3 660 344 A (DIETRICH ET AL.) 2 May 1972 see claim 1 -----</p>	7-9

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No.
PCT/NL 96/00492

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 265922 A	04-05-88	US 4725481 A	16-02-86
		CA 1321864 A	07-09-93
		DE 3773328 A	31-10-91
		JP 1859277 C	27-07-94
		JP 2139233 A	29-05-90
		JP 1600443 C	31-01-91
		JP 2020425 B	09-05-90
		JP 63116850 A	21-05-88
EP 708212 A	24-04-96	DE 4437521 A	25-04-96
US 3660344 A	02-05-72	NONE	